

TEZTM 8

TWO STAGE VACUUM PUMP

CFM

Remote Exhaust with a
“Garden Hose” Fitting

Adjustable
Multi-Port Input
for 1/4", 3/8" & 1/2"

TEZOM™ Oil Cartridge:
Clearly Visible Results

Easy-to-Clean
Debris Filter Screen

Clear Debris Tube and
Positive Pressure Relief

Wide, Low
Stance Prevents
Accidental Tipping

Save Hours, Save Days, Save Money



With simultaneous connections, the TEZ8 evacuates racks like these up to 10x faster than typical vacuum pumps

Thanks to massive flow and “on-the-fly” oil changes, the TEZ8 can outperform a 20-cfm belt-driven pump

Did You Know:

You may have to change your Vacuum Pump Oil **10 TIMES**
in the first 15 minutes of the job... If you want to go **FAST**



Clean Oil: Easy
5-Second Oil Change™




**Use direct connections,
large hoses, and no restrictions**



Clearly Visible Results
Easy to monitor progress

- Faster Evacuation:** Field-proven to outperform larger, belt-driven pumps by **hours or days**
- Adjustable Multi-Port Input:** Simultaneous connections to 1/2" and dual 3/8" inputs to allow for maximum flow
- Two-stage Exhaust System:** Vents moisture without breaking the vacuum, no gas ballast needed
- "Soft Start" Motor:** Reliable starting in extreme ambient conditions - even as low as -40°F/C

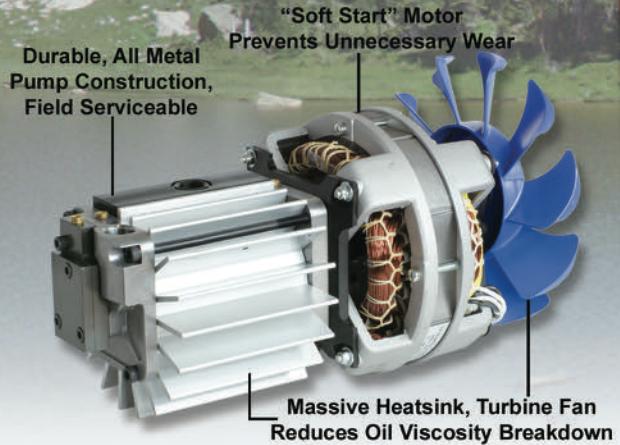

TEZ8

Product Specifications

Length	14.25 in.	362 mm
Height	10.03 in.	262 mm
Width	9.40 in.	239 mm
Weight	28 Lbs.	12.7 Kgs.
Power	115 VAC, 60 Hz, 10 Amps Int'l: 230 VAC, 50Hz 5 Amps Japan: 100 VAC, 60Hz 10 Amps	
Free Air Displacement	8cfm (227 l/m) @ 60 Hz 6.6cfm (189 l/m) @ 50 Hz	
Ultimate Vacuum	< 20 Microns	
Inlet Port Fittings	1/4", 3/8" (x2), 1/2" Flare	

- High-speed turbine fan & massive aluminum heatsink keeps the pump and oil cooler, reducing oil viscosity breakdown**
- Advanced “anti-suckback” eliminates check valves and other flow restrictions**
- Lightweight composite resin case for rugged durability and reduced weight**

Learn More About The TEZ8 At
www.AppionTools.com